




# DOCSIS 3.1 Cable Modem Router

with Wi-Fi 6 and  
Switchable Frequencies

CODA5610Q

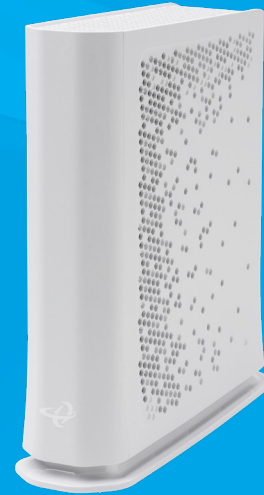

The CODA5610Q gateway is more than ready for every demanding application. Online game, virtual reality, 4K and 8K streaming, video conferencing...the CODA5610Q provides a flawless, stutter-free experience for it all. It supports DOCSIS 3.1 - up to 6 Gbps\* downstream. Inside-the-home networking is equally powerful, with next generation Wi-Fi 6, 2.5G ports and more. And software-switchable upstream frequency supports today and tomorrow's return path.

## DOCSIS 3.1 Certified

DOCSIS 3.1 takes Internet speeds to a new level, increasing the capacity of HFC networks by more than 50 percent and reducing latency. This means your customers can connect more devices, enjoy richer digital experiences and get fast, reliable Internet service for all of today and tomorrow's needs.

## Ready for 85MHz Returns

The CODA5610Q supports a software switchable 5-42MHz / 5-85MHz return path. The same device you deploy today can also support tomorrow's migration to a mid-split (5-85MHz) return path, enabling you to cost-effectively upgrade customers to higher-tier upstream speeds that can better support video conferencing, IoT, and interactive services.

## Key Features

- DOCSIS 3.1 2x2 OFDM/OFDMA
- DOCSIS 3.0 32x8 Channel Bonding
- 4x4 2.4GHz 802.11ax and 4x4 5GHz 802.11ax Dual-band Concurrent MU-MIMO Internal Antennas
- 16 SSIDs (8 SSIDs per Radio)
- Individual Configuration for each SSID
- Switchable Upstream: 5-42/5-85MHz
- One 2.5 GigE and two 1 GigE Ports
- TR-069 and HNAP for Easy Setup and Remote Management
- Supports IPv4 and IPv6
- Supports MyHitron+, HitronCloud and OptiMy



## Interfaces

- 1x RF F-Type 75Ω Female Connector
- 2x RJ-45 10/100/1000BASE-T Ethernet Ports
- 1x RJ-45 1/2.5GBASE-T Ethernet Port
- 1x USB 3.0 Type A Connector with Host Interface

## Reception-Demodulation

- DOCSIS 3.1/3.0/2.0
- DOCSIS 3.1 Demodulation: Multi-carrier OFDM 16 to 4096QAM
- DOCSIS 3.1 Data Rate: Up to 6Gbps with 2 OFDM 192MHz Downstream Channels + 32 SC-QAM
- DOCSIS 3.0 Demodulation: 64QAM, 256QAM
- DOCSIS 3.0 Data Rate: Up to 1.2Gbps with 32 Bonded Downstream Channels
- Frequency (edge-to-edge): 108-1002MHz
- Channel Bandwidth: 6MHz
- Signal Level: 15dBmV

## Transmitter-Modulation

- DOCSIS 3.1/3.0/2.0
- DOCSIS 3.1 Modulation: Multi-carrier OFDMA BPSK to 4096QAM
- DOCSIS 3.1 Data Rate: Up to 700Mbps with OFDMA 96MHz Upstream Channels
- DOCSIS 3.0 Modulation: QPSK, 8QAM, 16QAM, 32QAM, 64QAM, and 128QAM (SCDMA only)
- DOCSIS 3.0 Data Rate: Up to 320Mbps with 8 bonded Upstream Channels
- Frequency: Switchable 5-42MHz / 5-85MHz
- Upstream Transmit Signal Level: +11 to 65dBmV

## Wi-Fi

### Wi-Fi Characteristics

- 802.11a/b/g/n/ac/ax
- 4T4R 2.4GHz 11ax and 4T4R 5GHz 11ax Dual Band Concurrent MU-MIMO with 1.2Gbps + 4.8Gbps PHY Rate
- 20/40/80/160MHz Channel Bandwidth
- High Power Design for Multi-radio Co-location
- Supports Standard 5GHz UNII Bands

### Wi-Fi Features

- Up to 8 SSIDs per Radio
- Prioritized QoS: WMM/WMM-PS
- Transmit Power Control by Service Provider
- WPS (Wi-Fi Protected Setup) PBC, PIN
- Airtime Fairness (ATF)
- Band Steering (BS)
- Dynamic Frequency Selection (DFS)
- Wi-Fi Output Power Range: Max permitted by FCC/IC

## Wi-Fi Security

- WPA-PSK
- WPA2-PSK (TKIP/AES)
- WPA3-SAE

## Routing Support

- Protocol Support: IGMP v3 for IPTV service capability
- MAC Address Filtering (IPv4/IPv6)
- IP Source/Destination Address Filtering (IPv4/IPv6)
- DHCP, TFTP and ToD clients (IPv4/IPv6)
- DHCP Server supports RFC 1541 (IPv4)
- DHCPv6 obtains Prefix from DHCPv6 Server through Prefix Delegation
- Firewall with Stateful Inspection (IPv4/IPv6)
- Hacker Intrusion Prevention and Detection
- Application Content Filtering (IPv4/IPv6)
- Complete NAT Software Implemented as per RFC 1631 with Port and Address Mapping (IPv4)
- DSLite Support for IPv4 In-home Support with IPv6 MSO Backbone
- 6RD Support for Quick IPv6 Deployment over IPv4 Backbone
- RIPv2 for Static IP Support

## Management

- Protocol Support: TR-069, TFTP, SSHv2, SNMP v2, v3
- Web-based GUI Control, Configuration and Management
- Power-on Self-Diagnostic
- Hitron-proprietary MIBs for Extended Support on DOCSIS, Router Management, Wi-Fi Management and MoCA Management
- MyHitron+ App Configuration, Control and Management
- HitronCloud and OptiMy Backend Support and Optimization

## Mechanical

- LEDs: One Multi-colored LED
- Factory Default Reset Button
- WPS Button
- Dimensions: 251.5mm (H) x 74.3mm (W) x 230.8mm (D)
- Net Weight: 1850 +/- 10g

## Electrical

- Input Power: 12VDC, 4.0A
- Power Adaptor: 100-240VAC, 50/60Hz
- Power Consumption: 4.92W (power saving), 22W (typ.), 38W (Max)
- Surge Protection
  - RF Input sustains at least 4KV
  - Ethernet RJ-45 sustains at least 4KV

## Environmental

- Operating Temperature: 0°C (32°F) ~ 40°C (104°F)
- Operating Humidity: 10% ~ 90% (Non-condensing)
- Storage Temperature: -40°C (-40°F) ~ 60°C (140°F)

## Regulatory Compliance

- RoHS
- CableLabs
- WiFi Alliance WiFi 6
- FCC Part 15 Class B Subpart B, Part 15.247, Part 15.407, Part 2.1091
- ICES-003 Issue 6, Class B
- RSS-102 Issue 5
- IC RSS-247 Issue 2, 2017-02 and RSS-Gen Issue 5, 2018-4
- Canada RSS-Gen Issue 5, Amendment 1, Mar 2019
- UL 62368-1
- cUL 62368-1-14



I.T.V F219020